



# Versatility

---

## Trunked Mode with Conventional and LTR Systems

Kenwood's new TK-980/981 models allow programming for conventional and LTR systems operation with features such as fixed priority/block decode ID codes, free system ringback for telephone interconnect operation, transmit inhibit and transpond function

## Large Channel Capacity

In Trunked System, the 32 system and 250-group maximum memory capacity and 600-channel capability can meet all your site requirements now and in the future. Each programmed system can be either set for either conventional or LTR trunking operation.

System and group memory capacity varies depending on the total number of systems, groups and repeater channels per system.

## FleetSync Alphanumeric Two-Way Paging


The FleetSync basic alphanumeric two-way messaging provides the built-in capability of Selective Calling with Caller ID, Digital ANI, Emergency ANI & Emergency Calling features, Radio Stun & Resurrect and Status Messaging (send and receive radio pre-stored status messages). Optional Features include creation of custom alphanumeric text messages. Also, as with an alphanumeric pager, received pages are stored in memory for convenient viewing on the spot or for reviewing later.

## Data-Ready Connection Port

The TK-980/981 mobiles have a data connection port for versatile use with external mobile data terminals, PC-modems (requires KCT-19 option), or AVL units.

## Programmable Function Keys (PF Keys)

Each key is programmable for virtually and radio feature allowing fully customizes user settings. Streamline everyday operation with simple feature sets to meet basic needs and reduce training time. Sophisticated feature sets can be programmed for supervisory personnel or special applications.

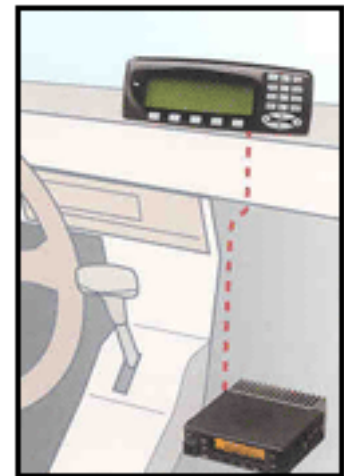

## Flash Memory Advantage

Inclusion of flash memory permits updates, advanced feature sets and system architectural changes to be made electronically without ever opening the unit. Providing for faster changes by the system operator and less downtime for users.

[Back to Top](#)

## Performance


---

### High-Quality Audio Output

The TK-980/981 is equipped with an extra-large 2.25-inch speaker element and delivers 4W audio power for excellent clarity, even in industrial settings with high-levels of background noise.

### Compact Versatile Mounting

Lightweight and compact in size, these units facilitate easy mounting even in the tight or awkward positions of today's vehicles. The front panel can be inverted for correct viewing while leaving the built-in speaker facing away from the mounting surface.

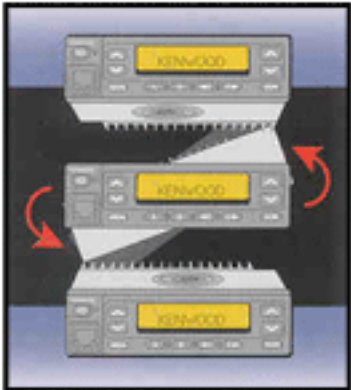

### Companded Audio (TK-981)

The compandor noise-reduction feature increases the audio clarity of narrow bandwidth systems and is programmable to function per channel. Voice intelligence components are amplified and compressed at the transmit end then re-expanded on the receive end to reproduce the original audio signal.

[Back to Top](#)

## Strength & Durability

---

### MIL-STD 810C/D/E Environmental Tests

Designed according to Kenwood's stringent operation tests for technical and industrial standards, the TK-980/981 also meets or exceeds a full range of tough U.S. Department of Defense MIL-STD 810 C, D & E environmental standards in several categories.

### Die-Cast Chassis

The lightweight aluminum die-cast chassis contributes to the TK-980/981 unit's exceptional strength and provides for natural heat dissipation. Interlocking metal covers and seals lockout moisture and dust.

[Back to Top](#)

## Intuitive User Interface

---



### Dot Matrix LCD Display

The unit's high-resolution dot matrix liquid crystal display provides a simple, easy-to-read interface and

is recessed for protection. The main display line has twelve alphanumeric characters for system/group/channel name aliases, operational/status indications and FleetSync features. A three-character subline can be programmed for channel or group number. The seven icons provide easy-to-remember feature and status indications in all modes of operation. Nighttime operation is facilitated with backlighting of the LCD panel and operation keys.

### Dual Color Tri-State LED Indicator

The Dual color tri-stated LED provides the user with a visual indicator that clearly distinguishes between transmission (red), reception (green) and decode alert for DTMF and Two-tone selective calling (flashing orange).

### Multiple Scanning Functions

Trunked Mode operation offers system and group scan permitting monitoring for calls on multiple systems and talk groups. The system can have a user or fixed add/delete status while groups are fixed add/delete. Priority scanning is available for Trunked Mode operation only within programmed conventional systems. Conventional Mode operation permits single priority scanning within a single group-multiple channel or multi-group configured radio. Talk back scan permits users to respond immediately to calls regardless of the pre-programmed or selected scan revert channels (conventional

mode).

## **DTMF Signaling & Dialing Features**

DTMF PTT ID provides a built-in ANI for public service, business and industrial applications. The manual DTMF operation with the optional KMC-28A keypad microphone permits DTMF controlled applications such as selective calling, system access, remote control and access to the radio's automatic dialing features such as the suto-dial memory for telephone interconnect and/or intergrated Radio-PABX systems

DTMF PTT ID is available in Conventional or Trunked Systems; DTMF PTT ID does not have an emergency ANI feature nor does it operate in conjunction with any of the emergency key or emergency calling features.

## **Public Address & Horn Alert**

Public Address (PA) and Horn Alert (HA) capability is available withthe optional KAP-1 unit. The PA function outputs mic audio through the radio's external speaker or can feed a more powerful external public address amplifier. The Horn Alert function can be used to trigger a vehicle horn/light.

[Back to Top](#)

# **Security**

---

## **Encryption Control**

Encryption control provides secure voice communications for law enforcement or private security. An internal port permits addition of optional modules for user-defined voice scrambling from low-level inversion to high-level encryption types. The radio's programming also provides both automatic and manual control for clear and coded modes.

## **Password-Protected Programming and Cloning**

Cloning for duplication of radios in the field is enabled via a simple interface cable, without the use of a PC or special test jigs. A secure password can be programmed to prevent cloning of a lost or stolen portable for users who do not require cloning capability. Additionally, all radios can have the programming password(s) protected to prevent unauthorized program information extraction and duplication in case of theft or loss.

## **Radio Lock Password**

Preventing unauthorized use of stolen radios, this feature requires an access code to

be entered every time the radio is powered up. The password can be selected with up to a maximum of 6 digits and can be easily field programmed or modified by an authorized user (requires optional KMC-28A keypad microphone).

### **Embedded Message**

The radio's flash memory can store an electronic message containing owner identification, property I.D. numbers, user and department names, service records, etc. Making a unit electronically identifiable even if external labels, markings or factory serial numbers have been removed.

### **Dead Beat Disable (D.B.D.)**

Useful when functions of the radio need to be rendered unusable, reception of a pre-determined DTMF signal can either disable the unit's signal transmission, or prohibit signal transmission, while muting signal reception volume.

[Back to Top](#)

## **Other Features**

---

- A NPSPAC-compatible model is also available (optional)
- BUILT-IN QT, DQT, DTMF
- BUSY CHANNEL LOCKOUT
- TIME OUT TIMER
- MINIMUM VOLUME
- KEY LOCK

## **Specifications**

---

	TK-980	TK-981
<b>GENERAL</b>		
<b>Frequency range</b>		
Type 1 (RX)		
Type 2 (TX)	851 - 870 MHz	935 - 941 MHz
Type 3 (Talk Around)	806 - 825 MHz 851 - 870 MHz	896 - 902 MHz 935 - 941 MHz
<b>Systems</b>	Max. 32	
<b>Groups</b>	Max. 250	
<b>Channels</b>	Max 600	
<b>Channel spacing</b>	25 kHz	12.5 kHz
<b>PLL step</b>	12.5 kHz	12.5 kHz
<b>Operating voltage</b>	13.6 V DC $\pm$ 15%	
<b>Current drain</b>		
Standby	Less than 0.4 A	
Receive	Less than 1.0 A	
Transmit	Less than 7.0 A	
<b>Duty cycle</b>	TRansmit: 20 %	
<b>Operating temperature range</b>	-22°F ~ +140°F (-30°C ~ +60°C)	
<b>Frequency stability</b>	+0.00015% (-22°F ~ +140°F)	
<b>Antenna impedance</b>	50 $\Omega$	
<b>Dimensions (W x H x D)</b>	5-1/2 x 1-1/2 x 5-3/4 in. (140 x 40 x 145 mm)	
<b>Weight (net)</b>	2.07 lbs. (940 g)	
<b>FCC ID</b>	ALH2456110	ALH2457110
<b>FCC compliance</b>	FCC part 90	FCC part 90
<b>IC certification</b>	282195546A	282195545A

	TK-980	TK-981
<b>RECEIVER</b> (Measurements made per EIA/TIA-603)		
<b>Sensitivity (12dB SINAD)</b>	0.25 $\mu$ V	
<b>Selectivity*</b>	75 dB	68 dB
<b>Intermodulation distortion*</b>	70 dB	65 dB
<b>Spurious response*</b>	80 dB	
<b>Channel frequency spread</b>	19 MHz	6 MHz
<b>Audio output</b>	4 W with less than 5% distortion	
<b>TRANSMITTER</b> (Measurements made per EIA/TIA-603)		
<b>RF power output</b>	15 W	
<b>Spurious response</b>	60dB	
<b>Modulation</b>	16K $\emptyset$ F3E	11K $\emptyset$ F3E
<b>FM noise</b>	45 dB	40 dB
<b>Audio distortion</b>	Less than 3%	Less than 5%
<b>Microphone impedance</b>	Low impedance	
<b>Channel frequency spread</b>	64 MHz	45 MHz

\* Typical specifications

Kenwood reserves the right to change specifications and features without prior notice.  
Measurements listed for the TK-981 model are tentative.

[Back to Top](#)

## Applicable MIL-STD

Standard	MIL 810C Methods/Procedures	MIL 810D Methods/Procedures	MIL 810E Methods/Procedures
Dust	510.1/Procedure I	510.2/Procedure I	510.3/Procedure I
Vibration	514.2/Procedure VIII	514.3/Procedure I	514.4/Procedure I
Shock	516.2/Procedure I, II, V	516.3/Procedure I, IV	516.4/Procedure I, IV

[Back to Top](#)

**Applied Technology Group, Inc.**, is a full service specialized communications company involved in communication and data solutions for a wide variety of applications. We are committed to providing quality data and wireless services, dependable equipment and competitive pricing. Our highest priority is to continue with excellence in customer service.